


Quick Start Guide

FlexNsert DAB Distribution Inserter


Quick connection

1. Power on the FlexNsert DAB.
2. Press the JogDial to enter the FlexNsert DAB menu.
3. Select the menu entry "Interface" by turning the JogDial and pressing it to enter the menu.
4. Select the menu entry "IP" and enter the menu by pressing the JogDial.
5. Change the IP address and Netmask to accommodate your needs.
6. Leave the IP menu by selecting the "Back" entry.
7. The device will ask for a reboot to activate the changes. Select "Yes".
8. Now you can configure the device conveniently via the Web interface. Just open a Web browser and enter the IP address of the device. The browser will ask for a login; username "admin", password "admin" will work in the initial state.

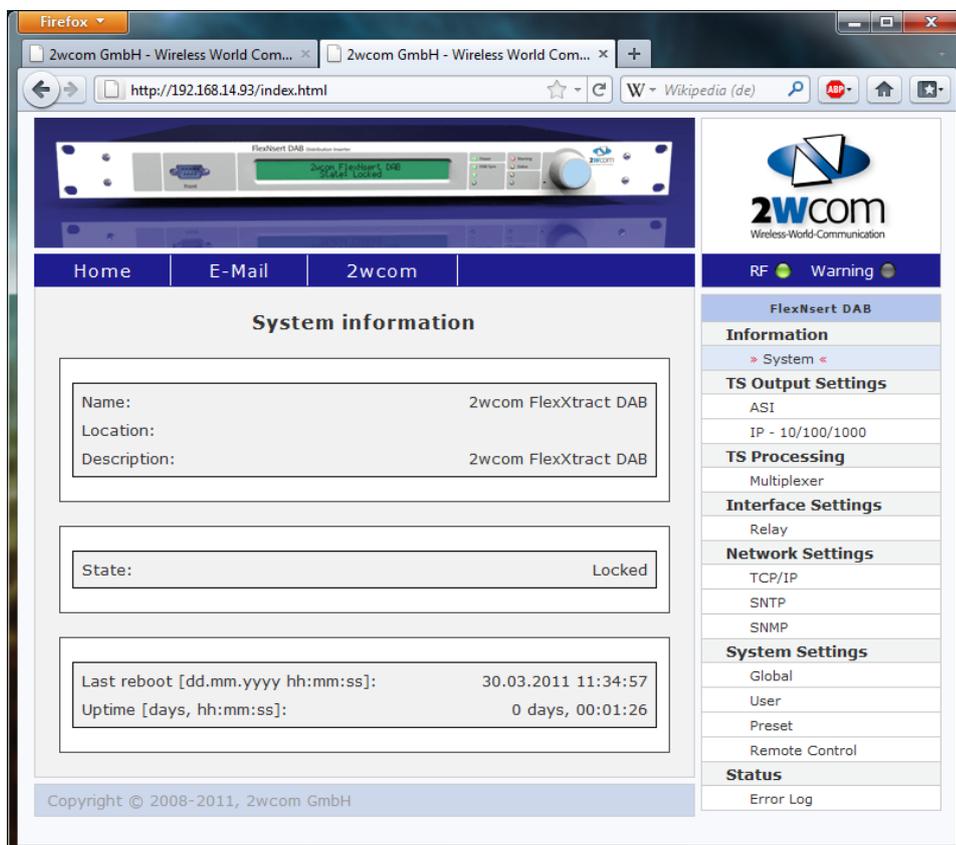

Output Setup

First make sure, that the ASI output is enabled. Open the menu item “ASI” form the category “TS Output Settings”:

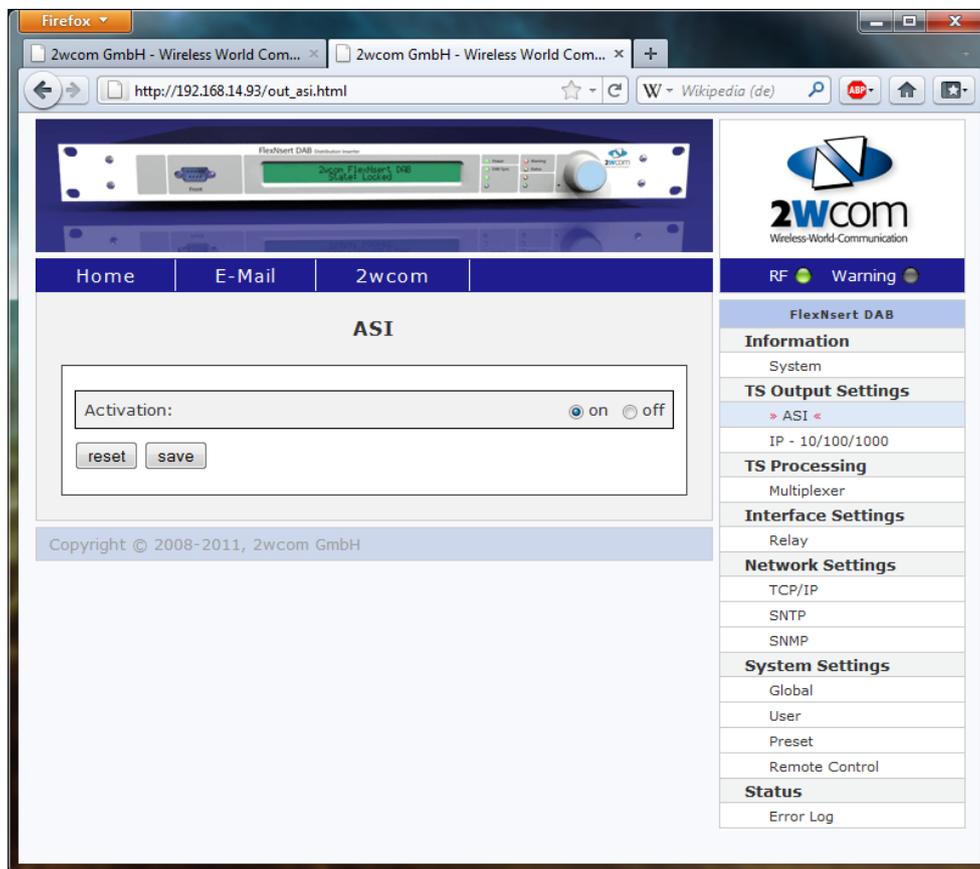


If the “Activation” shows “off”, select “on” and click “save”


ETI multiplexer setup

In order to encapsulate DAB –ETI stream into a MPEG2 TS the following steps have to be taken:

First open the menu “Multiplexer” of the “TS Processing” menu on the :

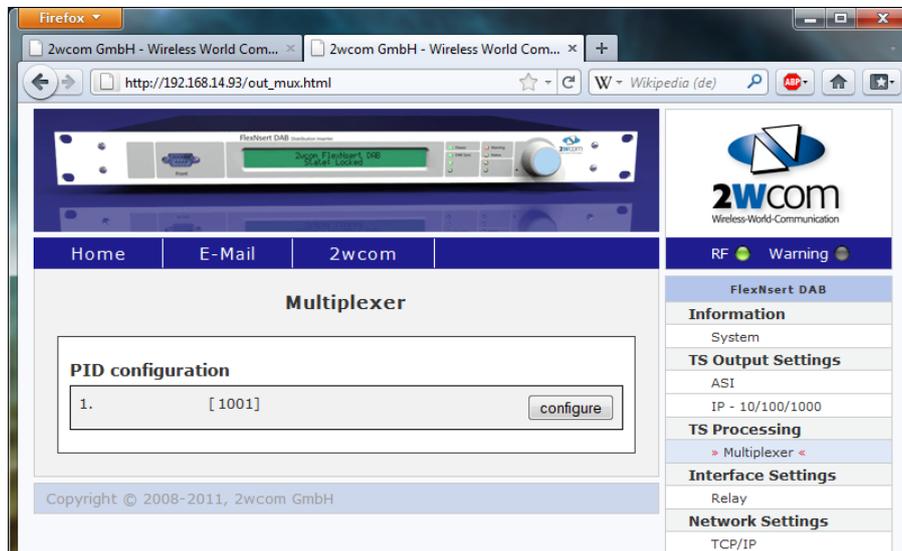


Now the PID has to be configured in which the DAB-ETI data stream is transported, for this press the “configure” button for PID configuration 1:

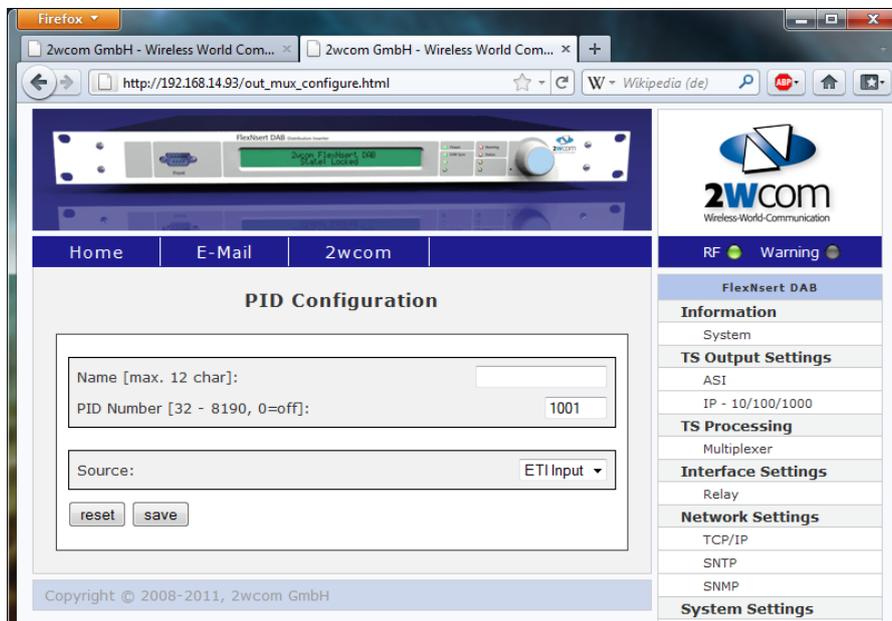

Now enter the PID number that should contain the DAB-ETI data stream and select “ETI Input” as source. Now press “save”.

If all is set up correctly, the system overview page (“System” under “Information” at the top of the menu) should show “State: Locked”:

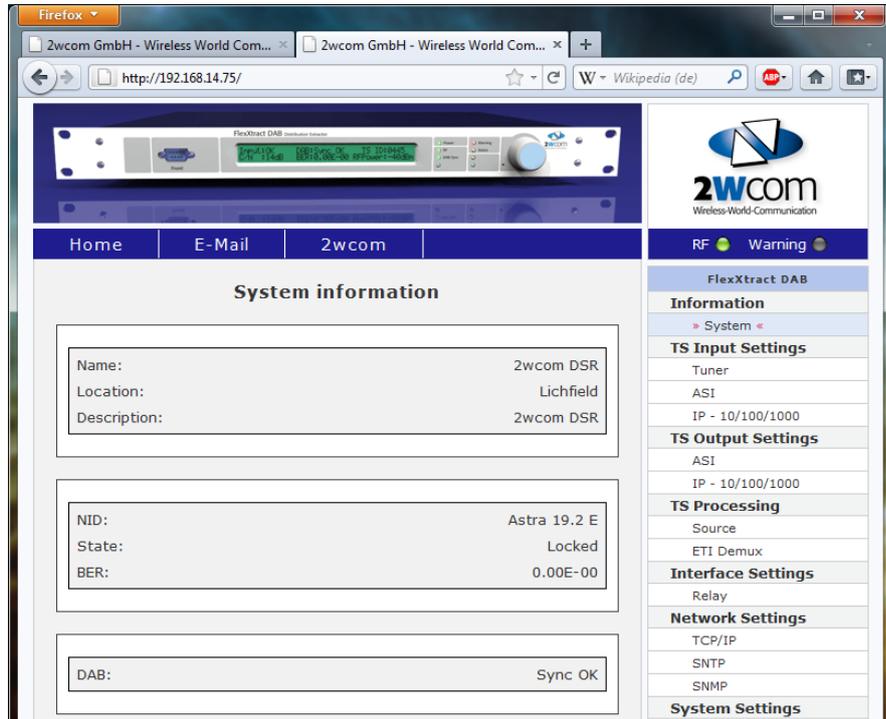

For any questions, contact:
support@2wcom.com